

Specification of
LiTech Power LiFePo4 4S10P 12V 60Ah Battery Pack
Model No.: LP4S10P8A5AF001



Documents No.	Edition No.	Approved By	Sheets
DSE-A-1214-01	V.1 Dimension Updated	Eng. HUANG G (06/09/19)	5

LiTech Power Co., Ltd

Factory Dongguan: 4F, Bldg B, RuiXin HengYe Industrial Park, TaiXing Rd # 18A, ShiGu District, TangXia Town, DongGuan, China
Factory Shenzhen: 3F, Bldg 3, Fulian Industrial Park, Heping Industrial area, Jianhui Rd, Longhua, ShenZhen, China

Tele: +86 769 8203 3052 | Fax: +86 769 82033050
www.LiTechPower.com | info@LiTechPower.com

Specifications and data are subject to change without notice. Contact LiTech Power for latest information.

Copyright © LiTech Power Co.,Ltd. All Rights Reserved.

1. General

LP4S10P8A5AF001 is a 4S10P LiFePO₄ rechargeable Battery Pack with Battery Management System integrated, normal voltage at 12V, rated capacity at 60Ah/720Wh, With LED Fuel gauge SOC Display, with ON/OFF switch, with open DC 5521 input and output separated connectors, with metal case.

- Battery Cell: CHINESE CLASS A CELL 32650 6Ah (ULApproved)
- BMS: BesTech Power HCX-D606V1 (UL Approved)

2. Battery Pack basic characteristics

2.1 Capacity	Nominal Capacity: 60Ah	
	Minimum Capacity: 59.8Ah	
2.2 Nominal Voltage	12V	
2.3 Internal impedance	≤ 300mΩ	
2.4 Discharge Cut-off Voltage	10.00V	
2.5 Max Charge Cut-off Voltage (from Charger)	14.60V	
2.6 Max. Continuous Charge Current	8A	
2.7 Max. Continuous Discharge Current	5A	
2.8 Max. Discharge Peak Current	8A for 5-10 seconds	
2.9 Cycle Life	≥ 2000 cycles After 800 cycles in 100% DOD charge and discharge at rated current, the residual discharge capacity is above 60% of nominal capacity	
2.10 Protections	All protections adopted, please check Specs. of the BMS as below	
2.11 Weight	5.3KG ± 300G	
2.12 Max. Dimension	240 x 190 x 99 mm (L*W*T)	
2.13 Operating Temperature	Charge	0°C ~ 45°C
	Discharge	-20°C ~ 60°C
2.14 Storage Temperature	Within 1 month	-5°C ~ 35°C
	Within 6 months	0°C ~ 35°C

LiTech Power Co., Ltd

Factory Dongguan: 4F, Bldg B, RuiXin HengYe Industrial Park, TaiXing Rd # 18A, ShiGu District, TangXia Town, DongGuan, China
 Factory Shenzhen: 3F, Bldg 3, Fulian Industrial Park, Heping Industrial area, Jianhui Rd, Longhua, ShenZhen, China

Tele: +86 769 8203 3052 | Fax: +86 769 82033050
 www.LiTechPower.com | info@LiTechPower.com

Specifications and data are subject to change without notice. Contact LiTech Power for latest information.

3. BMS Parameters

Item	Content	Criterion
1	over charge protection voltage	3.65V ± 25mV
2	over charge recovery voltage	3.45V ± 50mV
3	over charge protection delay time	80ms - 120ms
4	over discharge protection voltage	2.5V ± 50mV
5	over discharge recovery voltage	3.0V ± 100mV
6	max. continuous discharge & Charge current	5A discharge & 8A charge
7	over discharge current protection current	9-12A
8	over discharge protection delay time	40ms -100ms
9	short-circuit protection delay time	10ms - 20ms
10	static self-consumption current	I < 6.0uA
11	PCB internal resistance	R < 65mΩ
12	passive balancing	126mA ± 15mA @ 3.60V ± 0.025V
13	temperature switch / NTC	75°C ± 5°C
14	E-switch	YES

4. Battery Pack Construction



LiTech Power Co., Ltd

Factory Dongguan: 4F, Bldg B, RuiXin HengYe Industrial Park, TaiXing Rd # 18A, ShiGu District, TangXia Town, DongGuan, China

Factory Shenzhen: 3F, Bldg 3, Fulian Industrial Park, Heping Industrial area, Jianhui Rd, Longhua, ShenZhen, China


Tele: +86 769 8203 3052 | Fax: +86 769 82033050

www.LiTechPower.com | info@LiTechPower.com

Specifications and data are subject to change without notice. Contact LiTech Power for latest information.

Copyright © LiTech Power Co.,Ltd. All Rights Reserved.

4. Battery Pack Construction Illustration & Labels

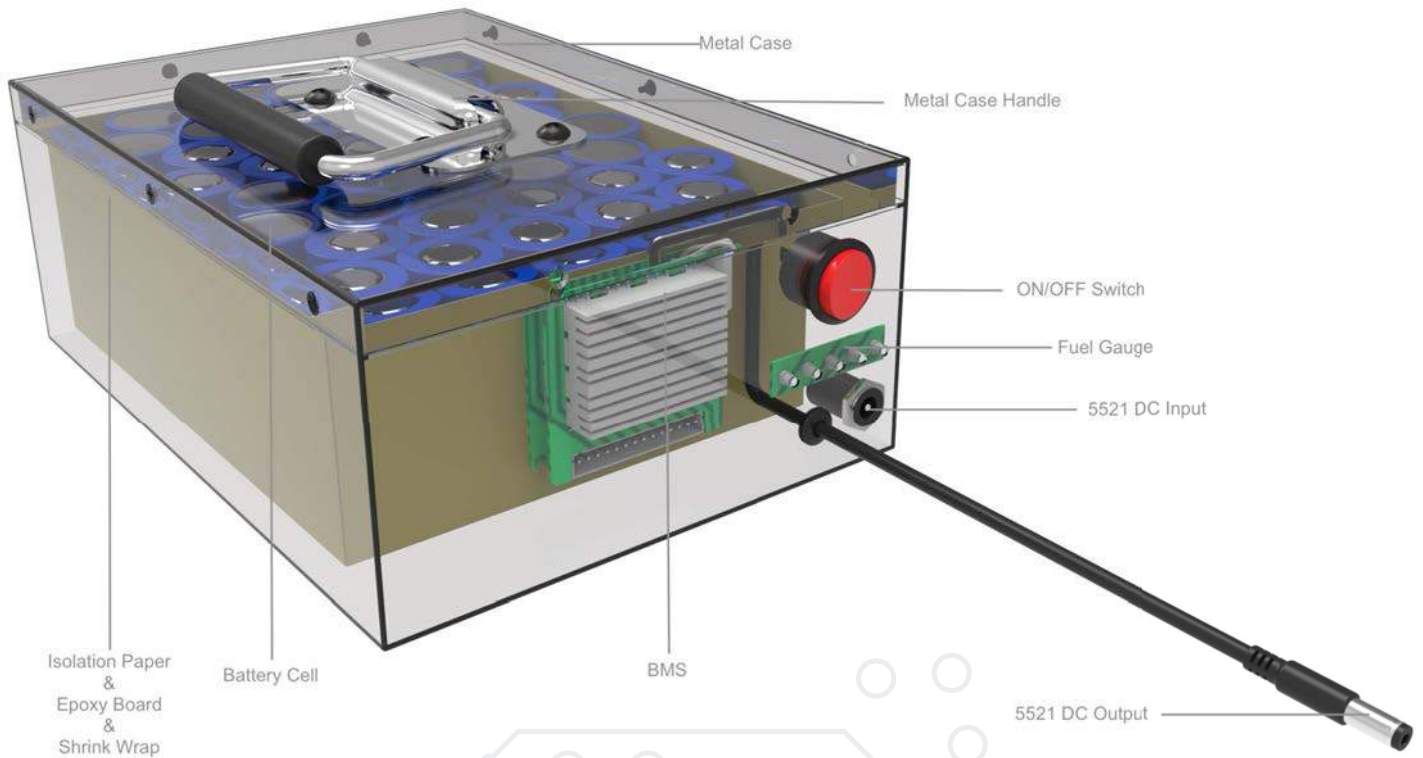

LiTech Power Co., Ltd.

Li-ion Battery Pack

LiTech
—|— POWER —|—



MFN P/N.: LP4S10P8A5AF001
Rated Voltage: 12V
Rated Capacity: 60Ah / 720Wh
Charging Cut-off Voltage: 14.60V
Production Date: 09-08-2019



20190101BatteryPackXXXX-08

CE FC UN38.3 MSDS



⚠ WARNING

- Do not disassemble or puncture the battery, avoid hands or metal objects touching the battery.
- Do not make the battery short circuit, reverse cable, over charged or over discharged.
- Do not put the battery in high temperature or humidity place, Keep away from fire and water.
- Do not dash or squeeze the battery.
- We recommend charge the battery every 2 months during storage.
- Please charge battery with dedicated charger, otherwise the battery may on fire or damaged.
- Please comply with local regulations when discarding the battery, otherwise it may severely polluting the environment.

LiTech Power Co., Ltd

Factory Dongguan: 4F, Bldg B, RuiXin HengYe Industrial Park, TaiXing Rd # 18A, ShiGu District, TangXia Town, DongGuan, China
Factory Shenzhen: 3F, Bldg 3, Fulian Industrial Park, Heping Industrial area, Jianhui Rd, Longhua, ShenZhen, China

Tele: +86 769 8203 3052 | Fax: +86 769 82033050
www.LiTechPower.com | info@LiTechPower.com

Specifications and data are subject to change without notice. Contact LiTech Power for latest information.

Copyright © LiTech Power Co.,Ltd. All Rights Reserved.

5. Standard test conditions

Any tests are to be conducted with new batteries that have not been cycled more than five times in one month before the test. Unless otherwise defined, test and measurements done under a temperature of $20 \pm 5^{\circ}\text{C}$ and relative humidity of 45~85%. If it is judged that the test results are not affected by such conditions, the tests may be conducted at Ambient Temperature: $25 \pm 5^{\circ}\text{C}$; Relative Humidity: $65 \pm 20\%$.

5.1 Standard Charge:	Constant Current and Constant Voltage (CC/CV) Current = 8A End-up Voltage = 14.6v / 3.65V (per cell) End Current = 15mA
5.2 Standard Discharge:	Constant Current (CC) Current = 5A End Voltage = 10V / 2.5V (per cell)

6. Transportation

The rated energy of the accumulator is Dangerous Goods of shipping, therefore you need strictly transport them by road, by railway, by sea and by air, special handling and restrictions on shipping procedures are always needed. BUT Violent shaking, bumping, rain and flaring sun shall be forbidden during the transportation. Keep the battery less than 30% charged, according to IATA shipping regulations.

Transport classification:

UN Class: 9 Class | UN number: UN3480



LiTech Power Co., Ltd

Factory Dongguan: 4F, Bldg B, RuiXin HengYe Industrial Park, TaiXing Rd # 18A, ShiGu District, TangXia Town, DongGuan, China

Factory Shenzhen: 3F, Bldg 3, Fulian Industrial Park, Heping Industrial area, Jianhui Rd, Longhua, ShenZhen, China

Tele: +86 769 8203 3052 | Fax: +86 769 82033050
www.LiTechPower.com | info@LiTechPower.com

Specifications and data are subject to change without notice. Contact LiTech Power for latest information.

Copyright © LiTech Power Co.,Ltd. All Rights Reserved.

7. Storage

Please keep the pack in the cool and dry environment: Within 1 month -5°C~35°C or Within 6 months 0°C~35°C, Relative humidity ≤75%, don't keep the packs fully charged.

8. Warranty

All LiTech Power products are covered by a one year limited warranty. The warranty covers premature failure due to defects in materials and / or workmanship. Any breakage caused by accidental damage or as a result of abuse or misuse is not covered. The warranty is limited to the original purchaser and is not transferable.

The warranty is void if the serial number is removed from the product or if the battery has been modified in any way. Please charge your battery directly after each use. Leaving your battery in discharged state will seriously and permanently damage its performance. Please note we cannot uphold warranty claims in these circumstances. Your battery will degrade over time and with use, such degradation is not covered by warranty.

9. Notice

The information in this specification subject to change without prior notice. The information contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult LiTech Power directly.

10. Caution

- * Please read the specification carefully before testing or using the battery, as improper handling of Lithium-ion battery may result in loss of efficiency, heating ignition, electrolyte leakage or even explosion.
- * While testing the battery of charging and discharging, please use the testing equipment special for Li-ion battery. Do NOT use the ordinary source of constant current and constant voltage, which fails to restrict charge and discharge to battery in order to prevent the battery from being overcharged and over-discharged, triggering battery malfunction or explosion.
- * When charging and discharging the battery or packing it into the equipment, do NOT reverse the terminals of cathode and anode or it will make the battery overcharging and over-discharging, causing the battery to lose efficiency seriously and even explode.
- * Do NOT weld the battery directly, do not disassembly the battery.
- * Do NOT put the battery together with such metal products as necklace, hairpin, coin or screw in the pocket or in the bag; neither store them together. Do NOT connect the positive and negative electrode directly with such conductive materials as metal, or it may make the battery short-circuit.
- * Do NOT beat, throw or trample the battery. Do NOT put the battery into the washing machine or the high-pressure container.
- * Do NOT put the battery close to heat source, for instance, fire, heater etc. Do NOT use the battery under the circumstance of burning sun or the temperature exceeding 60°C, or it may cause the battery to generate heat, heating ignition and loss of efficiency.
- * Do NOT get the battery wet or throw the battery into water. When not use, it should be placed in the dry and low temperature environment.
- * While using, testing or preserving the battery, if you find the battery become hot, distribute smell, change color, deform or any other abnormality, please stop using or testing immediately, and attempt to isolate and keep away from the battery.
- * If the battery leaks, the electrolyte gets into the eyes, do not rub eyes, instead, rinse the eyes with plenty of water, and seek medical service. If the electrolyte gets onto the skin or clothes, wash it with plenty of water immediately.

LiTech Power Co., Ltd

Factory Dongguan: 4F, Bldg B, RuiXin HengYe Industrial Park, TaiXing Rd # 18A, ShiGu District, TangXia Town, DongGuan, China

Factory Shenzhen: 3F, Bldg 3, Fulian Industrial Park, Heping Industrial area, Jianhui Rd, Longhua, ShenZhen, China

Tele: +86 769 8203 3052 | Fax: +86 769 82033050
www.LiTechPower.com | info@LiTechPower.com

Specifications and data are subject to change without notice. Contact LiTech Power for latest information.

Copyright © LiTech Power Co.,Ltd. All Rights Reserved.