



GreatVolt Titan31B

12.8V 173Ah LiFePO4 Battery for RV & Van, Marine & Trolling Motor, Solar & Off-Grid.



IP67
Waterproof



Heating
Function



Long
Life



Zero
Maintenance



Ultra
Safe



Light
Weight



With
Bluetooth



Full Temp
Protections



Fast
Charging



Plug &
Play

*100A continuous | 346A surge for 5 seconds | 500A surge for 2 seconds

*Note: This built-in protection will reset after five seconds in most fault conditions. Disconnecting the battery from loads will also reset the BMS.

TITAN31B TECHNICAL SPECIFICATIONS

Electrical Specifications

Nominal Voltage	12.8V
Nominal Capacity	173Ah
Energy	2214.4Wh
Self Discharge	2~3% Per Month
Maximum Batteries in Series	4
Maximum Batteries in Parallel	4
Built-in BMS	Internal
Resistance	<20 mΩ
Cell Chemistry	LiFePO4(Lithium Iron-Phosphate)

Charging Specifications

Recommended Charge Current	0.2C/34.6A
Max Charge Current	100A
BMS Charge Current Protection	173A
Recommended Charge Voltage	14.6V
Reconnect Voltage	@ 13.2V
Balancing Voltage	@ 3.2V Per Cell
Charge Protection Voltage	15V

Discharging Specifications

Max Discharge Current	150A
Discharge Surge Current	346A for 5 seconds
Surge for Loads Over	500A for 2 seconds
Recommended Low Voltage Disconnect	11.2V
BMS Discharge Cut-Off Voltage	10V
Reconnect Voltage	12V
Short Circuit Protection	Yes

Temperature Specifications

Discharge Temperature	-4°F to 149°F (-20°C to 65°C)
Charge Temperature	32°F to 122°F (0°C to 50°C)
Storage Temperature	32°F to 95°F (0°C to 35°C)
Reconnect Temperature	Discharge 131 °F (55°C) Charge 113 °F (45°C)

Mechanical Specifications

Dimensions	329mmL X 173mmW X 237mmH
Weight	18KG
Terminal Type	M8
Terminal Torque	619~974in-lbs (70~110N-m)
Case Material	Stainless Steel
Waterproof Level	IP67

Integrated Heating Specifications

Heat	Integrated Heating Technology
Heating ON	Auto ON- > 10A and < 0°C
Heating OFF	Auto OFF- > 5°C
Continuous Power Draw (When Enabled)	100W
Required Minimax Charging Current	>10A

Certifications

Certifications	UL1973,UL9540A,IEC62619 for cells MSDS for shipping UN38.3
----------------	---


Communication Protocols

CAN	✓
RS485	✓
UART	✓
Bluetooth	✓


* Heating - Charging in Subzero Weather will Automatilly turn on heating function.

* Storage - Please keep the battery in the cool and dry environment: Within 1 month -5°C~35°C or Within 6 months 0°C~35°C, relative humidity ≤75%, please charge the battery pack (around 50% SOC) regularly (every 60~90 days) to keep its chemistry active and longer lifespan. Long shelf time without charging the battery, the battery may completely depleted or totally died. Please DO remove the battery from your device when battery NOT IN USE for long time.


MICCHANICAL DRAWING

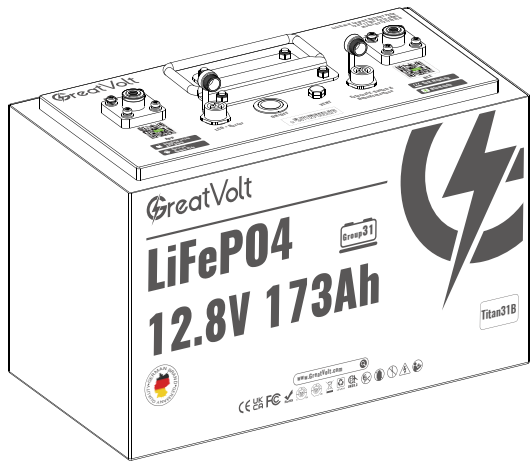


Perspective

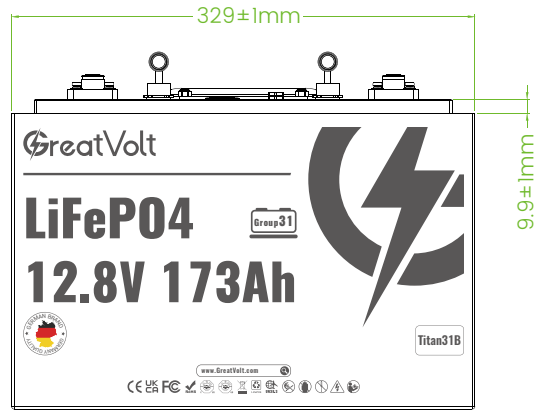


Front view

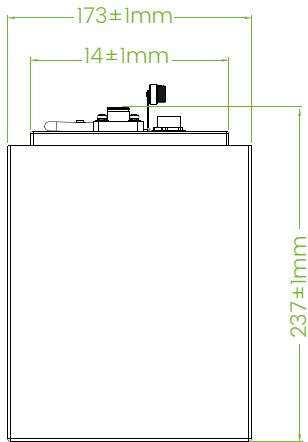


Side view

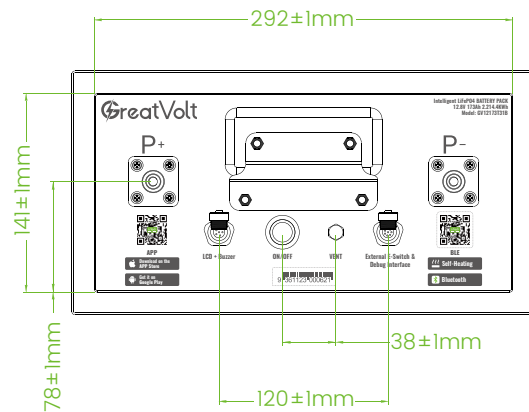

Top view

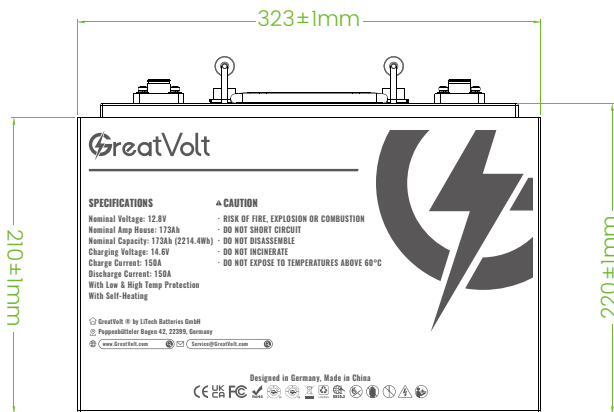


Rear view

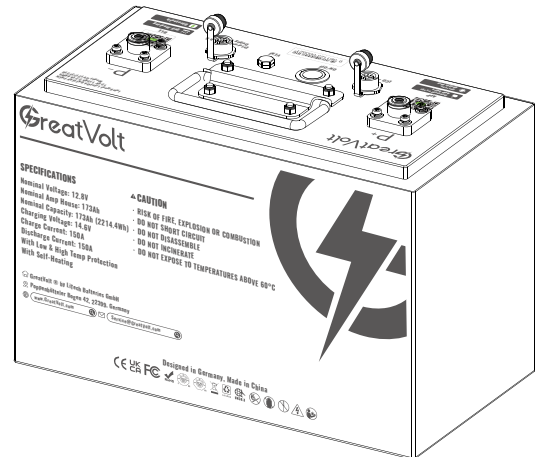


Perspective

RATE CHARGE-DISCHARGE CURVE


Discharge tests were performed at 25°C/77°F

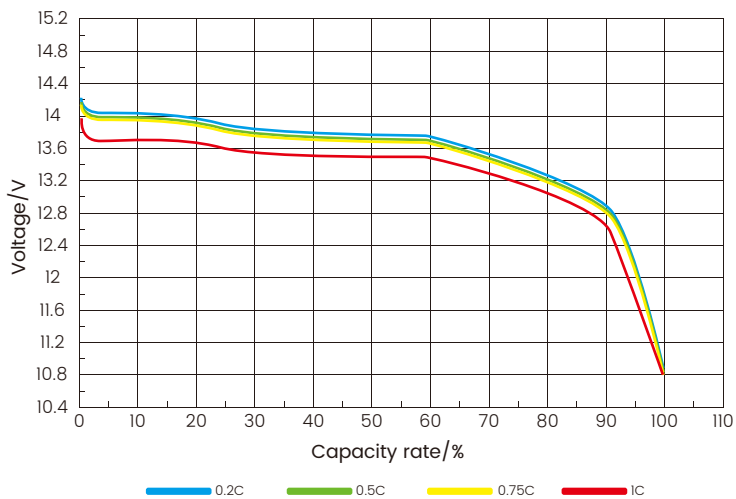


Charge tests were performed at 25°C/77°F

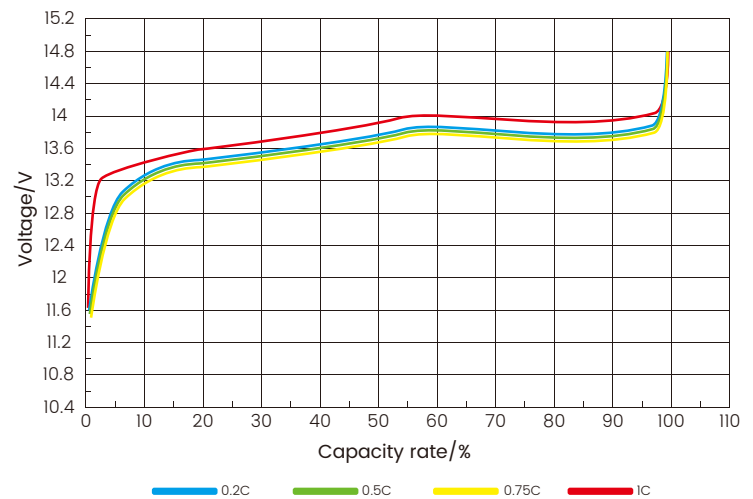

0.2C High and low temperature discharge

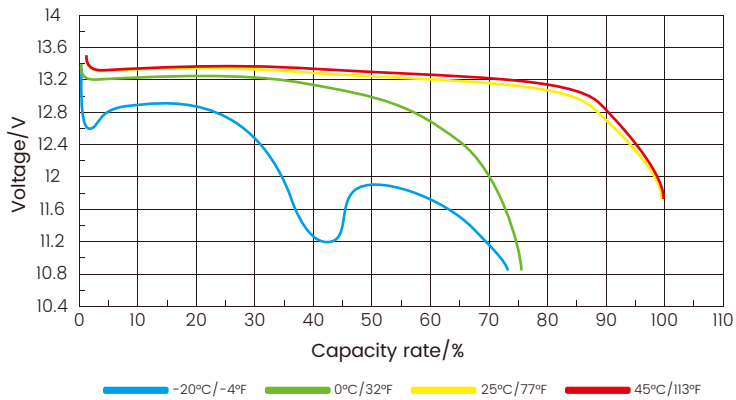

0.5C Cycle curve

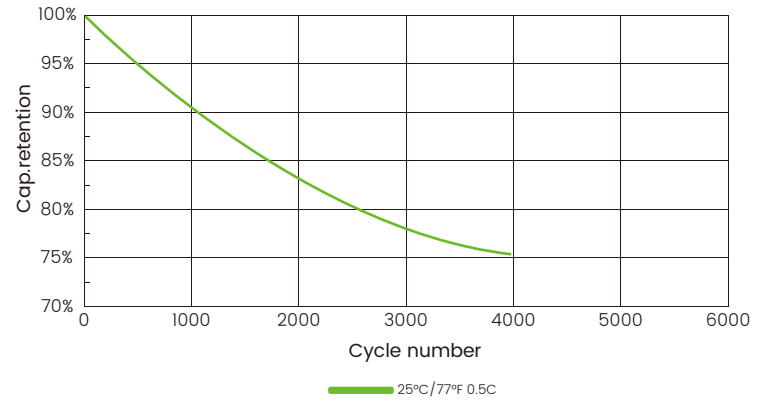

PERFORMED OPERATION DATA FOR HEATED BATTERIES

Heating data at different temperatures (charging heating)

